

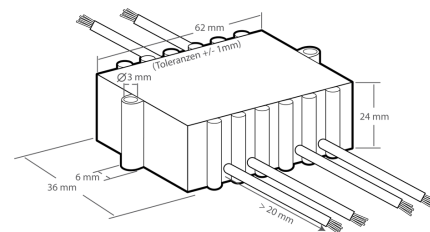
**Kemo Electronic GmbH**

Mato Vukovic  
 Leher Landstr. 20  
 27607 Geestland  
 Germany

Phone: +49 4743 9338-0  
 Fax: +49 4743 9338-22

<http://www.kemo-electronic.de>  
 email: [info@kemo-electronic.de](mailto:info@kemo-electronic.de)

HR.Nr. HRB 111 486  
 UstNr: DE 814 380 369

**M012 - Power Control 110 / 240 V/AC, 1200 VA****M012**

...regulates ohmic or inductive loads like heaters, hand drills, etc. via a potentiometer. Auxiliary module M150 | DC + Pulse Converter. When superposing this module, it also possible to control the dimmer module M012 with control voltages (1 - 5 V/DC or 3 - 12 V/DC or 6 - 24 V/DC) or with TTL pulses (optionally in each case).

Available accessory: M150 - DC + pulse converter

**Technical Data:**

Admissible operating voltage: 110 / 240 V/AC, 50 - 60 Hz

Operating temperature range: approx. 0°C to +50°C

Max. admissible current: 6 A (constant duty: 3 A)

: At 110 V/AC this corresponds to maximally 600 watt or constant duty 300 watt, respectively, or to maximally 1200 watt or constant duty 600 watt, respectively, at 240 V/AC.

Duty cycle: 100% at 3 A or 20% (max. 3 min.) at 6 A, respectively Control: via a firmly connected rotary potentiometer

Loads: for ohmic or inductive loads

Dimensions: approx. 70 x 36 x 23 mm