6 November 2026

Kemo Electronic GmbH
Rolf Wittig
Leher Landstr. 20
27607 Geestland
Germany

Phone: +49 4743 9338-0
Fax: +49 4743 9338-22


http://www.kemo-electronic.de
email: info@kemo-electronic.de

HR.Nr. HRB 111 486
UstNr: DE 814 380 369

M013N - Twilight switch 240 V/AC



M013N

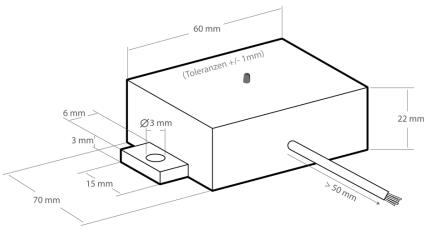

This electronic twilight switch connects automatically by means of an installed relay lamps (e.g. energy saving lamps) or other consumers at nightfall and off again at daybreak. The module may also work the other way round: on at daybreak (for advertising displays, fountains etc.) and off at nightfall. Floating loads up to 3 A may be switched.

Technical Data:
Operating voltage: 210 - 240 V/AC
Current consumption: < 40 mA
Switching contact (floating): 1 x switchover max. load 3 A (resistive load) max. 1 A (inductive load)
Turn-on brightness: approx. 10 Lux ± 50%
Turn-off brightness: approx. 60 Lux ± 50%
Delay in reaction: approx. 30 sec. ± 50%
Temperature range: approx. -15°C - +40°C
Dimensions: approx. 70 x 60 x 23 mm (without fastening straps)