3 November 2026

Kemo Electronic GmbH
Rolf Wittig
Leher Landstr. 20
27607 Geestland
Germany

Phone: +49 4743 9338-0
Fax: +49 4743 9338-22


http://www.kemo-electronic.de
email: info@kemo-electronic.de

HR.Nr. HRB 111 486
UstNr: DE 814 380 369

M028N - Power control 110 - 240 V/AC, 4000 VA



M028N

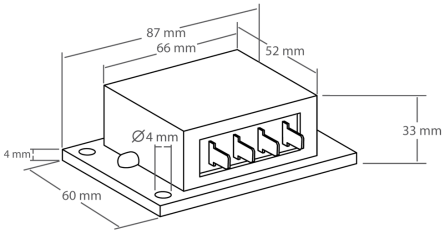

Control of resistive + inductive loads (e.g. motors, heatings etc., if they are phase-controllable).
Auxiliary module: M150 - DC + pulse converter
When superposing this module, it also possible to control M028N with control voltages (1 - 5 V/DC or 3 - 12 V/DC or 6 - 24 V/DC) or with TTL pulses (optionally in each case).

Important installation instructions, please note!

Technical Data:
Operating voltage: 110 - 240 V/AC
Loading capacity: 110 V/AC this corresponds to max. 2000 VA and to max. 4000 VA at 240 V/AC
Max. load: 18 A when mounting on a heat sink
Without additional heat sink: max. 6 A (peak max. 25 A / 10 sec.)
Regulation: phase control
Connectable loads: ohmic + inductive loads (see circuit description)
Dimensions: 87 x 60 x 33 mm (with mounting bottom)