15 November 2026

Kemo Electronic GmbH
Rolf Wittig
Leher Landstr. 20
27607 Geestland
Germany

Phone: +49 4743 9338-0
Fax: +49 4743 9338-22


http://www.kemo-electronic.de
email: info@kemo-electronic.de


HR.Nr. HRB 111 486
UstNr: DE 814 380 369

M055 - Stereo amplifier 3 W



M055

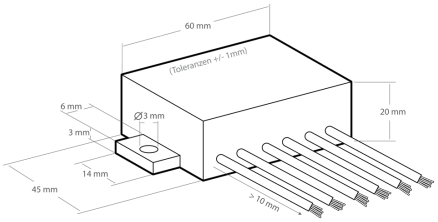



This universal stereo amplifier is shakeproof and waterproof encapsulated. The operating voltage should normally be 9 V (max 10 V). It is suitable for many applications, i.a. also to amplify the signal from headphone outputs for external speakers.
Available accessory:
M040N - Universal preamplifier (two pieces are needed for stereo)
M237 - Stereo Preamplifier

Technical Data:
Output power: max. 3 W musical power (2 x 1.5 W)
Operating voltage: 3 - 10 V/DC
Loudspeaker socket: 8 - 32 ohms
Input sensitivity: < 100 mV
Frequency response: ca. 20 - 20.000 Hz
Dimensions: ca. 60 x 45 x 20 mm (without fastening straps)