

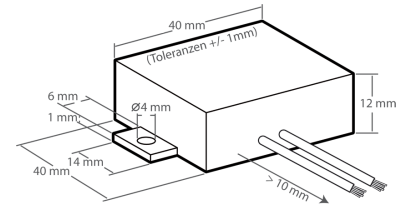
**Kemo Electronic GmbH**

Mato Vukovic  
 Leher Landstr. 20  
 27607 Geestland  
 Germany

Phone: +49 4743 9338-0  
 Fax: +49 4743 9338-22

<http://www.kemo-electronic.de>  
 email: [info@kemo-electronic.de](mailto:info@kemo-electronic.de)

HR.Nr. HRB 111 486  
 UstNr: DE 814 380 369

**M188 - Battery Guard 12 V**

Indicates in 5 steps via 3 LEDs the actual charging condition during operation of an 12 V accumulators. Thus it is easier to control the accumulator and a total discharge can be prevented. In addition it is checked whether the accumulator is in order and it receives the full charging voltage from the battery charger. (If the Battery guard is connected during charging of the battery.) The Battery guard is designed to monitor a battery in a closed, active circuit. Very low consumption of less than 4.9 mA!

**Technical Data:**

Operating voltage: 10.4 - 15.5 V/DC

Current consumption:  $\emptyset < 4.9$  mA

Display: 3 LEDs for: Full (green), Low (yellow), Empty (red)

Measuring range: (Tolerance: max. 5%)

- red:  $< 10.4$  V

- yellow/red: 10.5 - 10.8 V

- yellow: 10.9 - 12.2 V

- yellow/green: 12.3 - 12.6 V

- green:  $> 12.7$  V

Dimensions: approx. 40 x 40 x 13 mm (without fixing straps)