7 listopada 2026

Kemo Electronic GmbH
Rolf Wittig
Leher Landstr. 20
27607 Geestland
Germany


Phone: +49 4743 9338-0
Fax: +49 4743 9338-22

http://www.kemo-electronic.de
email: info@kemo-electronic.de

HR.Nr. HRB 111 486
UstNr: DE 814 380 369

M157 - Marten defence



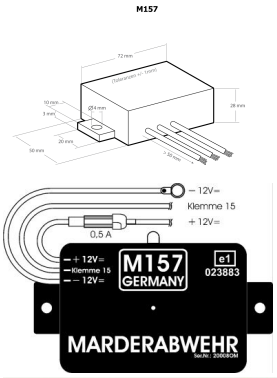

...chases away martens from cars, garages, etc. with sharp, high tone bursts (ca. 12 kHz). Automatic activation in parking cars.

Dane techniczne:
Operating voltage: 11 - 15 V/DC
Operation display: LED on the upper side of the device
Current consumption: average ca. 1,2 mA (± 20 %)
Frequency: approx. 12 kHz (± 10 %)
Acoustic pressure: max. 85 dB (± 25 %)
Pulse frequency: ca. 10 sec. on, then an interval of 10 sec. (± 20 %)
Fuse in the fuse holder: F 0,5 A
Operating temperature range: ca. -25 - +70 °C
Type approval by the Federal Motor Transport Authority: e1*72/245*2006/28*3884*03
Dimensions: ca. 91 x 50 x 28 mm (L x W x H with mounting straps)











