



**Kemo Electronic GmbH**


Mato Vukovic  
 Leher Landstr. 20  
 27607 Geestland  
 Germany

Phone: +49 4743 9338-0  
 Fax: +49 4743 9338-22

http://www.kemo-electronic.de  
 email: info@kemo-electronic.de

HR.Nr. HRB 111 486  
 UstNr: DE 814 380 369

**M157 - Marten defence**

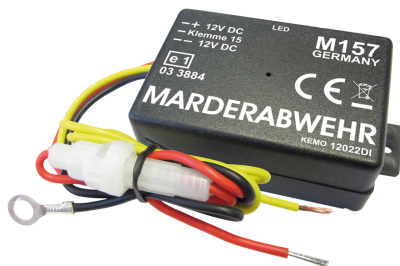

Chases away martens from cars, garages, etc. with sharp, high tone bursts (approx. 12 kHz). Extremely low current consumption: < 0.0012 A (0.015 W). Automatic activation in parking cars.

**Technical Data:**

- Operating voltage: 11 - 15 V/DC
- Operation display: LED on the upper side of the device
- Current consumption: average ca. 1,2 mA (± 20 %)
- Frequency: approx. 12 kHz (± 10 %)
- Acoustic pressure: max. 85 dB (± 25 %)
- Pulse frequency: ca. 10 sec. on, then an interval of 10 sec. (± 20 %)
- Fuse in the fuse holder: F 0,5 A
- Operating temperature range: ca. -25 - +70 °C
- Type approval by the Federal Motor Transport Authority:  
 e1\*72/245\*2006/28\*3884\*03
- Dimensions: ca. 91 x 50 x 28 mm (L x W x H with mounting straps)

