6 November 2026


Kemo Electronic GmbH
Rolf Wittig
Leher Landstr. 20
27607 Geestland
Germany

Phone: +49 4743 9338-0
Fax: +49 4743 9338-22

http://www.kemo-electronic.de
email: info@kemo-electronic.de

HR.Nr. HRB 111 486
UstNr: DE 814 380 369

M240 - Power Control 230 V/AC, 10 A, Multifunction

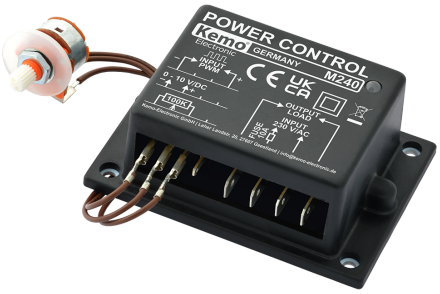

Power controller for 230 V/AC consumers such as motors, lamps, many dimmable LEDs etc. The controller is overload- proof and can be controlled via a potentiometer (100 K lin.), a control voltage (0 - 10 V) or with PWM signals (0 - 100%, 100 - 10,000 Hz).

Technical Data:
Operating voltage: 220 - 230 V/AC 50 - 60 Hz
Max. connectable load: 10 Ampere (2,300 W)
Control mode: phase angle control
Switching-on: soft start
Operating display, overload display: 2-coloured LED
Control options: with potentiometer 100 K lin or control voltage 0 - 10 V/DC or PWM signal 3 - 24 V 100 - 10,000 Hz
The control signal input is completely isolated from the load control circuit.
Connections: Plug contacts flat plugs 6.3 mm and 2.8 mm
Dimensions: approx. 87 x 60 x 33 mm